

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau(43) International Publication Date
31 December 2003 (31.12.2003)

PCT

(10) International Publication Number
WO 2004/001943 A1(51) International Patent Classification⁷: H02N 11/00,
H04R 23/00, G09B 21/00(21) International Application Number:
PCT/TB2003/002449

(22) International Filing Date: 4 June 2003 (04.06.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
02077426.1 19 June 2002 (19.06.2002) EP(71) Applicant (for all designated States except US): KONIN-
KLIJKE PHILIPS ELECTRONICS N.V. [NL/NL];
Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

(72) Inventor; and

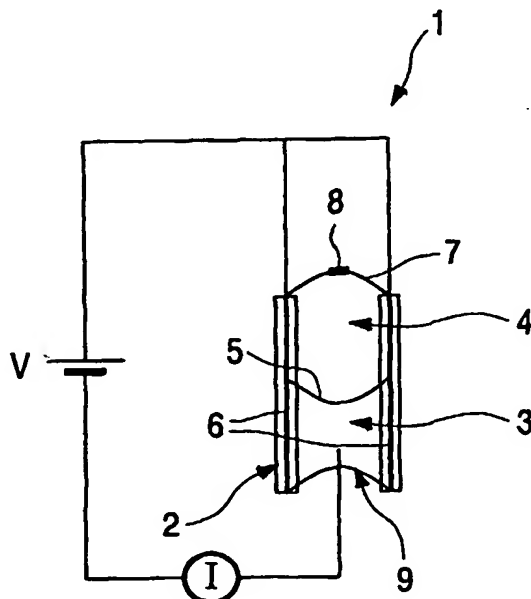
(75) Inventor/Applicant (for US only): PRINS, Menno, W., J.
[NL/NL]; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven
(NL).(74) Agent: VAN DEN HOOVEN, Jan; Philips Intellectual
Property & Standards, Prof. Holstlaan 6, NL-5656 AA
Eindhoven (NL).(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD,
SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US,
UZ, VC, VN, YU, ZA, ZM, ZW.(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: TACTILE DEVICE

(57) Abstract: The invention refers to a tactile device
provided with a number of fluid elements (1) containing
an electrically conducting fluid (3, 4). The fluid level
in each element is movable by actuator means (V, 6)
applying a electric power to said fluid elements. Each fluid
element is at one end provided with a tactile element (7)
that is in contact with the fluid for perception of the fluid
level by a user. The fluid elements comprise capillary
tubes (2) in which the fluid level is movable as a result of
electro-capillary pressure.